

Stanisław Węglarczyk

THE EFFICIENCY OF SOME FORECASTING METHODS APPLIED TO ANNUAL MINIMUM FLOW SERIES

Summary

Four methods of forecasting: „no-change”, LOESS, local linear regression and Holt-Winters were applied to annual minimum water levels observed at ten cross-sections of two tributaries of the Vistula river. The 1-, 2-, ..., 5-year forecasts were made for each year after some initial year, and four quality measures: bias, root mean square error, mean absolute error and maximum absolute error were calculated for each time series and lead time. The naïve model turned out to be always the worst in it bias and almost always very good, sometimes the best regarding the other measures.

Key words: forecasting, LOESS, local linear regression model, Holt-Winters model

INTRODUCTION

In many forecasting problems situations exist where nonlinearity is seen and, additionally, of alternating monotonicity, sometimes quickly. In such cases and when no physical model is available, global approach, e.g., nonlinear regression, in finding trend and, basing on it, making forecasts, is not justified. Using a nonparametric, or local, method may be the solution. There are several methods of nonparametric approach [Helsel and Hirsch, 1997]; some of them are tested in the paper.

Annual minimum levels of a river are of interest for their connection, among others, with the elevation of river bottom (erosion problems) and water supply problems. Of interest, therefore, is predicting the future values of annual minimum levels of and the related uncertainty.

The aim of the paper is to study the efficiency of four forecasting methods in their application to annual minimum level time series. The methods selected

are: „no-change” or naïve, LOESS, local linear regression and Holt-Winters models. Four forecast efficiency measures are used: bias, B , root mean square error, $RMSE$, mean absolute error, MAE , and maximum absolute error, $mxAE$.

METHODS

For given time series $y_t, t = 1, 2, \dots, n$, of annual minimum flows a forecast f_t is sought for all time instants $t > t_0$. Forecasting is made using the following four models.

The “naïve” or “no-change” model. The assumptions behind this model are as simple as possible and can be expressed by the following formula:

$$f_{t+i} = y_t, \quad i = 1, 2, \dots, m \quad (1)$$

where f_{t+i} is the forecast of y for time $t + i$ and m is the maximum lead time of the forecast. In the paper the model serves as the reference in assessing the forecasting quality and usability of other models.

The LOESS model. There exist several nonparametric regression methods of which a method called LOWESS or LOESS (locally weighted scatterplot smoothing) [Cleveland i Loader, 1995] turned out to be very useful. In the paper, the method is applied in its linear version.

Assume that the mean annual minimum level $y(t)$ of a river at time instant t in the neighbourhood of time instant t_i can be described by a linear formula

$$y(t) = a + b(t_i - t) + \varepsilon(t) \quad (2)$$

where ε is normal random error, $N(0, \sigma)$. Regression coefficients a and b are calculated (separately for each t) by the method of locally weighted least squares with weights w :

$$(a, b) = \arg \min \sum_{i=1}^p w \left(\frac{t_i - t}{h} \right) e_i^2 = \arg \min \sum_{i=1}^p w \left(\frac{t_i - t}{h} \right) (y_i - a - b(t_i - t))^2 \quad (3)$$

After finding the regression coefficients a and b , we get from (2): $y(t_i) = a$. Parameter h , known also as the bandwidth, decides of the amount of smoothing of the cloud of points (t_i, y_i) . The greater the value of h , the smoother (less variable) is the formed line. It should be noted that the regression coefficients are calculated for each point t at which the estimated y value is to be found, and therefore the straight line (2) is valid only at one point t . The trend found by a nonparametric estimation method is not expressed explicitly in the form of equation – it is almost exclusively expressed in a graphic form.

Many formulas can be used for weight function $w(z)$. In practice, frequently used function is a tri-cube function [NIST, 2011], which was used in the paper in a one-sided form (Fig. 1):

$$w(z) = \begin{cases} (1 - |z|^3)^3 & -1 < z \leq 0 \\ 0 & z \leq -1 \text{ or } z > 0 \end{cases} \quad (4)$$

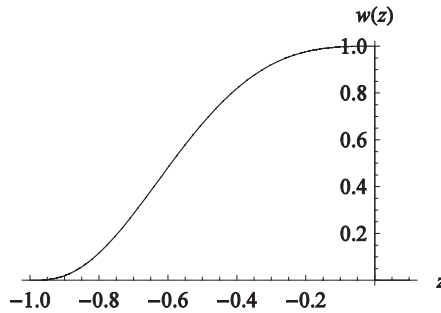


Figure 1. The LOESS weight function (4) used in the paper.

where

$$z = \frac{t_i - t}{h} \quad (5)$$

The bandwidth h is by definition the length of an assumed fixed instant of time (5-year period was adopted). Equations (4) and (5) show that the forecasted value will be affected by the values from the period $t_i - h + 1, t_i - h + 2, \dots, t_i$ with their influence decreasing with increasing temporal distance from the time t_i .

Generally speaking, the choice of weight function $w(z)$ and the bandwidth h is a subjective element of the non-parametric estimation, although there are some reasonable theoretical and practical reasons for their choice.

The LOESS forecast for time $t + i$ is

$$f_{t+i} = a + b(t + i) \quad (6)$$

[Li and Heckman, 1996] where a and b are obtained by method (3) applied to the last p observations before $t + 1$: $\{y_{t-p+1}, y_{t-p+2}, \dots, y_t\}$.

Local linear regression model. Because of the expected nonlinearities of annual minimum flow time series, it was assumed that only q last observations before $t + 1$ are of value for forecasting m future values. The linear regression model is therefore local and the forecast is calculated as

$$f_{t+i} = a + b(t + i) \quad (7)$$

where the regression parameters, a and b , are obtained by minimizing least squares for given series of observations $\{y_{t-q+1}, y_{t-q+2}, \dots, y_t\}$ with weights equal to one as is for usual regression. In the paper the value $q = 5$ was adopted.

Holt-Winters forecasting model. The Holt-Winters forecasting model used in the paper can be summarized in the following equations [NIST, 2011]:

$$f_{t+i} = A_t + iB_t \quad (8)$$

$$A_t = \alpha y_t + (1 - \alpha)A_{t-1}, \quad t > 1 \quad (9)$$

$$B_t = \beta(A_t - A_{t-1}) + (1 - \beta)B_{t-1}, \quad t > 1 \quad (10)$$

with initial values:

$$A_1 = y_1; \quad B_1 = y_2 - y_1 \quad (11)$$

The two parameters of the model, α and β , are found by minimizing the model mean square error for series of observations $\{y_2, y_3, \dots, y_t\}$.

MEASURES OF FORECAST UNCERTAINTY

Four measures of model forecast uncertainty were used: bias B , root mean square error $RMSE$, mean absolute error MAE , and maximum absolute error $MxAE$. They are defined by the following equations:

– bias:

$$B = \frac{1}{n - m - t_0} \sum_{t=t_0+1}^{n-m} (f_t - y_t) \quad (12)$$

– root mean square error:

$$RMSE = \sqrt{\frac{1}{n - m - t_0} \sum_{t=t_0+1}^{n-m} (f_t - y_t)^2} \quad (13)$$

– mean absolute error:

$$MAE = \frac{1}{n - m - t_0} \sum_{t=t_0+1}^{n-m} |f_t - y_t| \quad (14)$$

– maximum absolute error

$$mxAE = \max_{t=t_0+1, \dots, n-m} |f_t - y_t| \quad (15)$$

Although different initial time instant t_0 could be assumed, to make the comparison of efficiency measures adequate, a single value of $t_0 = 5$ was used throughout the paper.

DATA

Ten non-interrupted time series of length at least 50 years were selected to the analysis. The cross-sections were selected on two right-side tributaries of the Vistula river and were as follows: Mszana Dolna, Stróża, Gdów and Proszówki on the Raba river and Kowaniec, Krościenko, Nowy Sącz, Czchów, Zgłobice and Żabno on the Dunajec river. Time course of the levels is shown in Fig. 2.

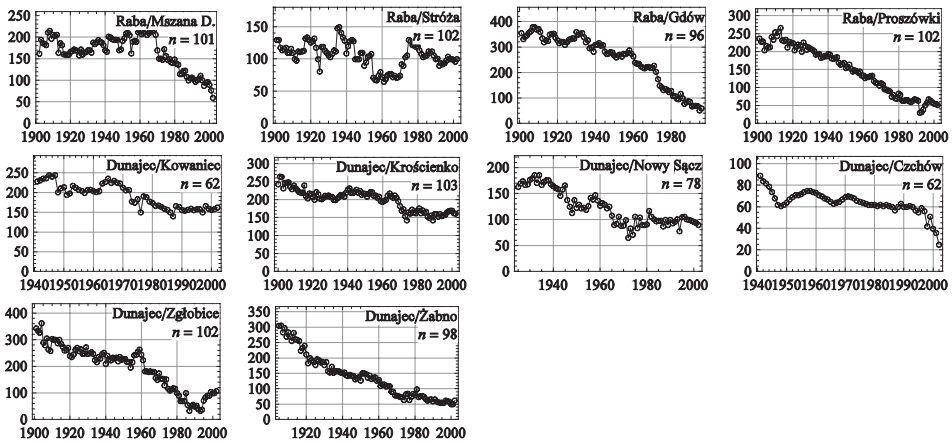


Figure 2. Annual minimum level time series at the selected cross-sections

RESULTS AND DISCUSSION

For each of 10 time series four forecast models were applied. It was assumed that a 5 year-period preceding the forecast is sufficient for LOESS and linear regression and 1-, 2-, ..., 5-year forecasts were made for each year $t > 5$. Parameters of the Holt-Winters model were calculated by minimizing *RMSE* for each $t > 5$, basing on series y_1, \dots, y_t . Exemplary graphical visualizations of 1-, 2-, ..., 5-year forecast produced by each method is shown in Fig. 3.

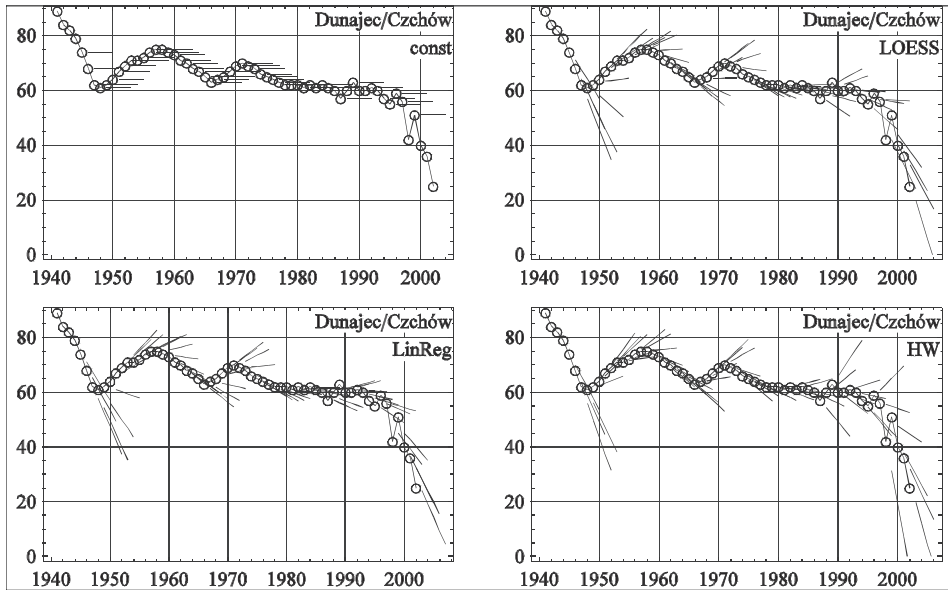


Figure 3. Five-year forecasts by four forecasting methods: const, LOESS, linear regression (LinReg) and Holt-Winters (HW) at the Czchów cross-sections on the Dunajec river

Forecast lines in Fig. 3 illustrate the forecasting ability of the applied methods. LOESS, LinReg and HW are acceptable in these parts of a time series which are of monotonic character. Points at which monotonicity alternates and their right-hand neighbourhood generate the greatest errors. The naïve model shows here higher robustness.

To make comparison of the for methods as adequate as possible, forecasting values of all methods were compared with the observed ones for all time instants $t = 6, \dots, n - 5$ ($m = 5$), and using this data four quality measures, i.e., B , $RMSE$, MAE and $mxAE$ (equations (12), (13), (14) and (15), respectively), were calculated for each of 10 cross-sections and each lead time equal to 1, 2, ..., 5 years. The results are illustrated in Fig. 4; full information is given in Table 1.

Table 1. Values of the applied forecasting efficiency measures for lead times 1, 2, ..., 5 years. The values greater than 9.9 cm were rounded to whole numbers

B, cm	Raba/Mszana D.					Raba/Stróża					Raba/Gdów					Raba/Proszówki				
	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5
<i>const</i>	1.3	2.7	4.1	5.2	6.5	0.2	0.4	0.5	0.6	0.8	3.3	6.8	10.3	14	17.6	1.7	3.3	5	7	8.9
<i>LOESS</i>	0.3	0.7	1.1	1.2	1.8	-0.1	-0.1	-0.1	-0.3	-0.5	0.3	0.7	1.2	1.9	2.7	-0.1	-0.1	0	0.2	0
<i>LinReg</i>	0.4	0.8	1.2	1.5	2.1	-0.1	-0.1	-0.3	-0.5	-0.7	0.3	0.7	1.3	2	2.7	-0.1	-0.1	-0.2	-0.2	-0.5
<i>HW</i>	0.2	0.6	1	1.2	1.5	-0.4	-0.5	-0.8	-1.1	-1.4	0.1	0.5	0.9	1.4	2	-0.4	-0.5	-0.6	-0.4	-0.4
RMSE, cm																				
<i>const</i>	13	17	19	21	23	10	15	17	18	19	12	18	24	28	32	10	13	15	17	19
<i>LOESS</i>	15	23	29	36	41	13	21	26	31	36	14	23	32	41	51	11	16	21	26	30
<i>LinReg</i>	16	22	28	34	39	14	20	25	29	34	15	24	33	42	50	11	16	21	25	29
<i>HW</i>	15	22	27	32	38	11	16	20	22	24	14	22	32	42	53	11	14	18	23	27
MAE, cm																				
<i>const</i>	9	13	14	16	17	7	11	13	14	15	9	14	19	23	26	7	10	12	14	15
<i>LOESS</i>	11	18	22	28	32	10	16	21	24	28	12	18	26	34	43	8	12	15	19	22
<i>LinReg</i>	12	17	21	26	30	11	16	20	24	27	13	19	27	35	42	8	12	15	18	21
<i>HW</i>	10	17	21	25	29	8	12	15	17	19	11	18	26	33	42	8	11	14	16	19
mxAE, cm																				
<i>const</i>	42	55	65	65	68	38	40	51	47	56	32	54	78	85	96	34	36	41	54	44
<i>LOESS</i>	48	65	86	91	108	52	67	77	100	103	37	54	80	98	117	38	49	68	91	100
<i>LinReg</i>	51	70	77	80	101	45	58	70	88	89	39	58	76	88	106	39	47	65	81	88
<i>HW</i>	45	57	70	96	116	50	64	71	82	91	37	58	86	106	129	37	44	60	75	90

B, cm	Dunajec/Kowaniec					Dunajec/Krościenko					Dunajec/Nowy Sącz					Dunajec/Czchów				
	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5
<i>const</i>	1.4	2.9	4.6	5.4	6.4	0.9	1.8	2.6	3.3	4	1.1	2.2	3.5	4.8	5.9	0.9	1.4	1.9	2.1	2.5
<i>LOESS</i>	0.1	0.3	0.5	-0.3	-1	-0.1	-0.1	-0.2	-0.6	-1.1	0.1	0.2	0.5	0.9	0.9	0.2	0.2	0.1	0	0.1
<i>LinReg</i>	0.2	0.3	0.5	-0.2	-0.8	-0.1	-0.1	-0.3	-0.7	-1.2	0.1	0.3	0.6	1	0.7	0.2	0.2	0.1	0	-0.1
<i>HW</i>	-0.4	-0.8	-1.1	-2.3	-3.4	0	0	-0.1	-0.4	-0.9	0	0.4	0.8	1.2	1.3	0.1	0	-0.2	-0.5	0.3
RMSE, cm																				
<i>const</i>	13	15	17	19	21	9	11	12	14	15	13	13	16	16	18	4	5	6	7	8
<i>LOESS</i>	14	18	23	30	35	10	14	17	20	26	14	17	22	25	29	4	5	7	9	12
<i>LinReg</i>	14	18	23	29	34	10	13	16	20	24	13	17	21	23	25	4	5	7	9	12
<i>HW</i>	14	18	22	28	35	10	14	16	19	23	13	14	18	20	24	4	6	8	10	12
MAE, cm																				
<i>const</i>	8	12	13	14	16	7	9	10	11	12	10	10	12	13	15	2	3	4	5	6
<i>LOESS</i>	10	14	19	24	29	8	11	13	16	20	10	14	18	20	22	2	3	5	6	8
<i>LinReg</i>	10	14	18	24	28	8	10	12	16	20	10	13	17	18	20	2	4	5	7	9
<i>HW</i>	9	13	16	20	24	7	11	13	15	18	10	12	15	16	19	2	4	5	7	9
mxAE, cm																				
<i>const</i>	44	40	44	57	56	30	36	36	42	53	35	41	53	45	43	14	17	26	20	31
<i>LOESS</i>	46	50	55	64	72	31	40	60	62	71	42	44	63	71	87	15	14	21	27	34
<i>LinReg</i>	46	53	53	60	69	29	35	56	56	65	40	37	55	61	75	14	14	22	29	36
<i>HW</i>	49	54	62	92	139	34	46	59	60	69	38	36	46	45	59	20	21	29	30	38

	Dunajec/Zgłobice					Dunajec/Żabno				
<i>B</i> , cm	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5	<i>t</i> +1	<i>t</i> +2	<i>t</i> +3	<i>t</i> +4	<i>t</i> +5
<i>const</i>	1.9	3.8	6	7.7	9.6	2.2	4.8	7.3	9.5	12.1
<i>LOESS</i>	-0.5	-1.2	-1.8	-3	-4.4	-0.4	-0.3	-0.5	-1	-1.3
<i>LinReg</i>	-0.5	-1.2	-1.8	-3.1	-4.8	-0.4	-0.4	-0.6	-1.1	-1.5
<i>HW</i>	-2.4	-3.9	-5.1	-7	-8.7	-0.9	-1.3	-2	-2.8	-3.4
<i>RMSE</i>, cm										
<i>const</i>	17	22	25	28	31	11	14	14	18	20
<i>LOESS</i>	20	29	37	46	54	12	15	16	21	25
<i>LinReg</i>	20	29	37	44	51	12	13	16	20	23
<i>HW</i>	18	23	27	30	33	11	12	14	18	20
<i>MAE</i>, cm										
<i>const</i>	13	17	19	23	25	8	10	11	13	15
<i>LOESS</i>	16	23	30	36	43	9	11	13	16	18
<i>LinReg</i>	16	23	29	34	40	9	11	12	15	17
<i>HW</i>	14	18	20	22	25	8	9	11	14	15
<i>mxAE</i>, cm										
<i>const</i>	46	67	82	82	84	32	57	51	58	73
<i>LOESS</i>	56	72	110	125	138	32	45	48	57	90
<i>LinReg</i>	51	78	117	138	152	33	36	42	57	68
<i>HW</i>	57	73	82	84	91	31	37	39	47	54

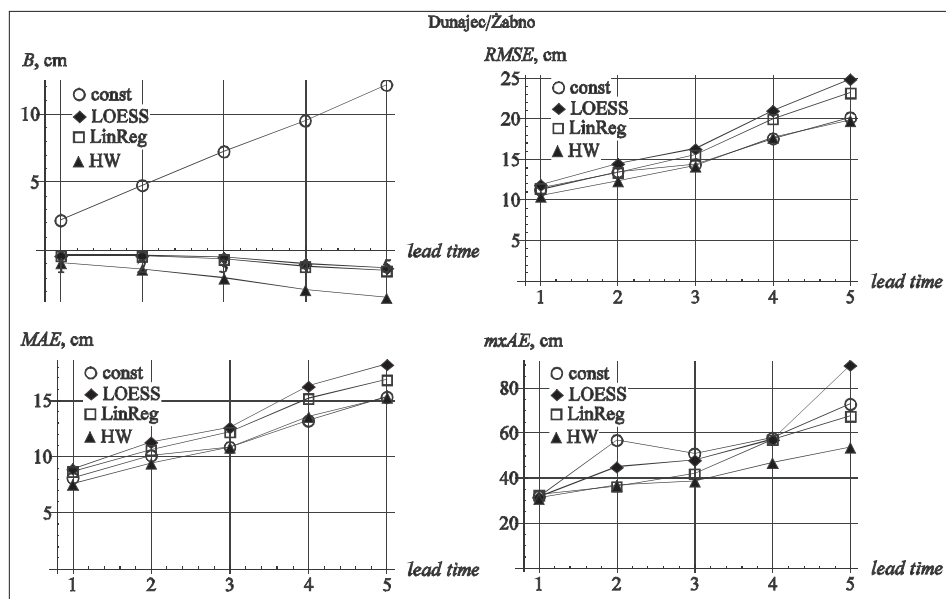


Figure 4. Rather typical image of the relationship between the forecast efficiency measures and lead time and the applied forecasting methods shown for the Żabno cross-sections on the Dunajec river

What is striking when looking at Fig. 3 is the big discrepancy between the bias of the naïve model and the biases of other models. The data in Table 1 confirm this finding, although this discrepancy in absolute values is in some case a few centimeters only. As regards the rest three measures: *RMSE*, *MAE* and *mxAE*, the naïve model is almost always the best of the three methods. Only if time series is roughly monotonic, as in the case of Dunajec/Żabno (see Fig. 1), the HW model seems to be better in *RMSE*, *MAE* and *mxAE* than the naïve model.

It should be underlined that no rules in excluding some data for forecasting were applied. Establishing such rules is justified in some cases, e.g., when great jump up or down occurred. Such event excludes the before-the-jump historical data; the consequence of this fact may be excluding all history and beginning forecasting as if no data were available.

Of all the three models the Holt-Winters model seems to be the best. However, how can be seen in Table 1, the differences between the HW model efficiency characteristics and those of the LOESS and LinReg models often do not differ much. The question to be answered is whether the user should prefer the bias of a model to a measure model variability (e.g., *RMSE*) or the opposite.

CONCLUSIONS

Ten time series of annual minimum level of length exceeding 50 were used to enable comparison of forecast efficiency of 4 models to be assessed. The efficiency of the naïve, LOESS, local linear regression and Holt-Winters models was measured by means of four characteristics: bias, *B*, root mean square error, mean absolute error, and maximum absolute error. The naïve model turned out to be the worst in its bias and very good, sometimes the best, as regards the other efficiency characteristics. It seems that a careful insight in historical data usefulness for forecasting is necessary to exclude high jumps that suggest a new future, different from the future suggested by the before-the-jump data.

ACKNOWLEDGMENT

This work was prepared within the research project No. PB-5546/B/T02/2010/38, financed by the Ministry of Science and Higher Education of Poland.

REFERENCES

- Cleveland, W. S., Loader, C. (1995) *Smoothing by local regression: Principles and methods*. Technical Report, AT&T Bell Laboratories, Murray Hill, NY.
- Helsel D. R., Hirsch R. M., *Statistical Methods in Water Resources*, Elsevier 1997
- Li, X. and Heckman, N. E. (1996) Local linear forecasting. *Technical Report 167*. Department of Statistics, University of British Columbia, Vancouver.
- NIST 2011, <http://www.itl.nist.gov/div898/handbook/pmd/section1/pmd144.htm>, (accessed 19.11.2011).

Dr hab. Stanisław Węglarczyk, prof. PK
Cracow University of Technology Institute
of Water Engineering and Water Management
ul. Warszawska 24, 31-155 Kraków
sweglar@pk.edu.pl

Reviewer: *Prof. Jerzy Gruszczyński*